

# Infrared Faucet Internal Mixer AC Power Source

Product Specifications



115.728.21.1

**■ GEBERIT®**

Advanced plumbing technology

## Model 115.728.21.1 Internal Mixer AC Power Source

### Product Specifications

Faucet shall be chrome-plated, all metal construction, solid brass spout measuring 4-13/16" from centerline of faucet.

Faucet shall feature: infrared self-adjusting sensor, single hole mounting; 115V AC power source required. All power source controls contained in spout cavity; removable shroud with internal temperature control; flow control 2.2 GPM (8.3 LPM) vandal resistant aerator; stainless supply lines (provided); filters backflow preventers (provided); direct to supply stop connection.

### Warranty

Five-year limited

### Options

4" c.c. chrome bolt down plate  
8" c.c. chrome bolt down plate  
Service remote control  
Point of use power converter  
Transformer for bank installations

### Optional Vandal Resistant Aerators

- 2.0 GPM (7.6 LPM) laminar flow
- 0.5 GPM (1.9 LPM) flow restrictor

### Features


- Self adjusting infrared actuation
- AC power source
  - Single point of use adapter
  - Bank installation (up to 8) transformer
- Internal temperature control
- Above deck access to all functional components
- Electrical access below deck
- Vandal resistant design
- Solid brass spout with triple chrome plating
- Vandal resistant aerator
  - 2.2 GPM (8.3 LPM) flow
- Two I. R. sensors
  - More accurate ranging
  - Less false starts
- Complies with ADA requirements
- Exclusive 90 second cleaning cycle
- Full five-year warranty
- Statistical feedback
  - With optional service remote

### Technical Data

- Ambient temperature range: 35°-104° F (1.6°-40° C)
  - 100% relative humidity
- Pressure range: 15-115 PSI (1-7.9 bar)
- Max. supply temperature: 190° F (88° C)
- Max. mixed supply temperature: 112° F (44.5° C)
- Safety Shut-off time – 40 to 60 seconds
  - Adjustable
  - Factory setting – 40 seconds

### Compliance

- ANSI/ASME A112.18-2000
- Americans with Disabilities Act (ADA)
- CAN/CSA – B125
- UL listed

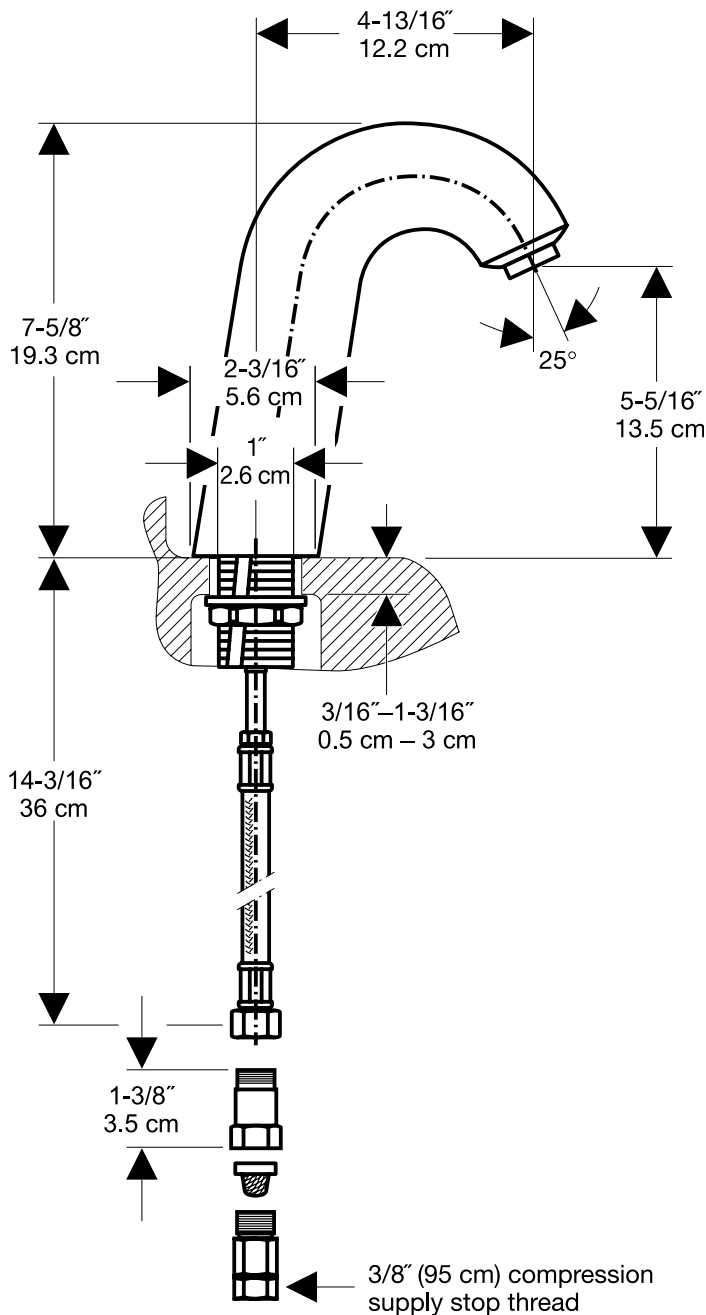

# ■ GEBERIT®

Advanced plumbing technology

Geberit Manufacturing, Inc.

1100 Boone Dr., Michigan City, IN 46360 USA

U.S.: Phone: 219.879.4466 • Toll-free: 800.225.7217 • Fax: 219.872.8003

Canada: Toll-free: 866.748.4646 • Fax: 514.648.8509

www.us.geberit.com