# Remote Valves 625-LESSPEDALSCP

## **Product Type**

Foot operated remote valve

### **Features & Specifications**

• NAIAD metering cartridge with fast cycle time closure

### **Performance Specification**

- Rated Operating Pressure: 20-125 PSI
- Rated Operating Temperature: 40-140°F

#### Warranty

- 5-Year Limited Cartridge Warranty
- Lifetime Limited Faucet Warranty
- 1-Year Limited Finish Warranty

## **Codes & Standards**

- 🖄 ASME A112.18.1/CSA B125.1
- 🖄 NSF/ANSI 61, Section 9



| Job Name              |                              |
|-----------------------|------------------------------|
| Item Number           |                              |
| Section/Tag           |                              |
| Model Specified       |                              |
| Architect             |                              |
| Engineer              |                              |
| Contractor            |                              |
| [] Submitted as Shown | [] Submitted with Variations |
| Date                  |                              |

No Image Available


> 2100 South Clearwater Drive Des Plaines, IL P: 847/803-5000 F: 847/803-5454 Technical: 800/TEC-TRUE www.chicagofaucets.com

## 625-LESSPEDALSCP



## **Architect/Engineer Specification**

Chicago Faucets No. 625-LESSPEDALSCP, Pedal Box Fitting for hot and cold water, without pedals, chrome plated. NAIAD rebuildable selfclosing metering cartridge, immediate shut-off, opens with push. Two 1/2" NPT female thread inlets. 3/8" NPT female thread outlet. This product is tested and certified to industry standards: ASME A112.18.1/CSA B125.1, and Certified to NSF/ANSI 61, Section 9.

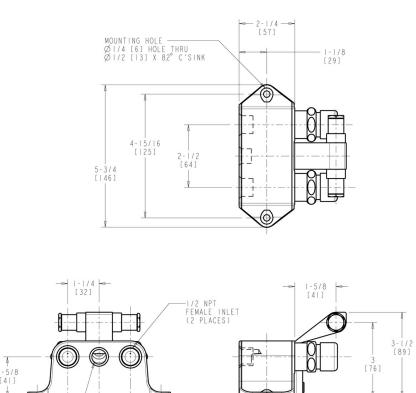

#### **Operation and Maintenance**

Installation should be in accordance with local plumbing codes. Flush all pipes thoroughly before installation. After installation, remove spout outlet or flow control and flush faucet thoroughly to clear any debris. Care should be taken when cleaning the product. Do not use abrasive cleaners, chemicals or solvents as they can result in surface damage. Use mild soap and warm water for cleaning and protecting the life of Chicago Faucet products. For specific operation and maintenance refer to the installation instructions and repair parts documents that are located at <a href="https://www.chicagofaucets.com">www.chicagofaucets.com</a>.

FINISHED FLOOR

Chicago Faucets, member of the Geberit Group, is the leading brand of commercial faucets and fittings in the United States, offering a complete range of products for schools, laboratories, hospitals, office buildings, food service, airports and sport facilities. Call 1.800.TECTRUE or 1.847.803.5000 Option 1 for installation or other technical assistance.



2100 South Clearwater Drive Des Plaines, IL P: 847/803-5000 F: 847/803-5454 Technical: 800/TEC-TRUE www.chicagofaucets.com

3/8 NPT FEMALE OUTLE