Safety Fittings 8008-NF



Product Type

Safety eye/face wash, drench shower fitting

Features & Specifications

Performance Specification

Warranty

- 1-Year Limited Finish Warranty
- 1-Year Limited Material Warranty

Codes & Standards


Job Name	
Item Number	
Section/Tag	
Model Specified	
Architect	
Engineer	
Contractor	
[] Submitted as Shown	[] Submitted with Variations
Date	·





Architect/Engineer Specification

Chicago Faucets No. 8008-NF, Eye/Face Wash with push paddle handle, wall-mounted. 1/2" NPT female thread inlet. 11" yellow ABS plastic receptor. High-impact ABS plastic spray head with cover.

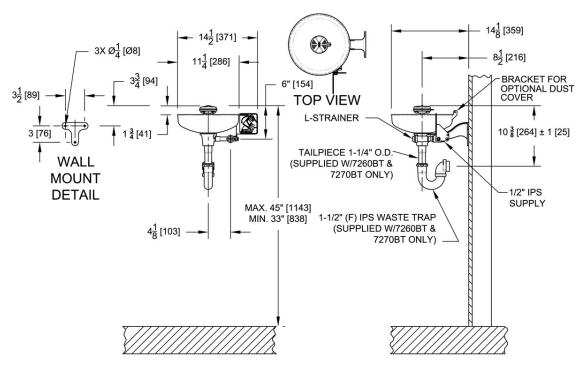

NOTES:

- 1. METRIC DIMENSIONS ARE IN BRACKETS [X].
- TO COMPLY WITH ANSI 2358.1-2009 FOR EMERGENCY EYEWASH OR EYE/FACE WASH:
 UNIT SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS AND ACCEPTABLE PLUMBING PRACTICES.
 EYEWASH OR EYE/FACE WASH SHALL BE POSITIONED WITH NOZZES NOT LESS THEN 8.3 CM (33 IN.) AND NO GREATER THAN 114.3 CM (45 IN.) FROM SURFACE ON WHICH USER STANDS AND 15.3 CM (6 IN.) MINIMUM FROM WALL OR NEAREST OBSTRUCTION
- 3. DIMENSIONS MAY VARY BY ± 1/2 [13]

Operation and Maintenance

Installation should be in accordance with local plumbing codes. Flush all pipes thoroughly before installation. After installation, remove spout outlet or flow control and flush faucet thoroughly to clear any debris. Care should be taken when cleaning the product. Do not use abrasive cleaners, chemicals or solvents as they can result in surface damage. Use mild soap and warm water for cleaning and protecting the life of Chicago Faucet products. For specific operation and maintenance refer to the installation instructions and repair parts documents that are located at www.chicagofaucets.com.

Chicago Faucets, member of the Geberit Group, is the leading brand of commercial faucets and fittings in the United States, offering a complete range of products for schools, laboratories, hospitals, office buildings, food service, airports and sport facilities. Call 1.800.TECTRUE or 1.847.803.5000 Option 1 for installation or other technical assistance.

